




# CABEZAL ACCIONADO POR PAR



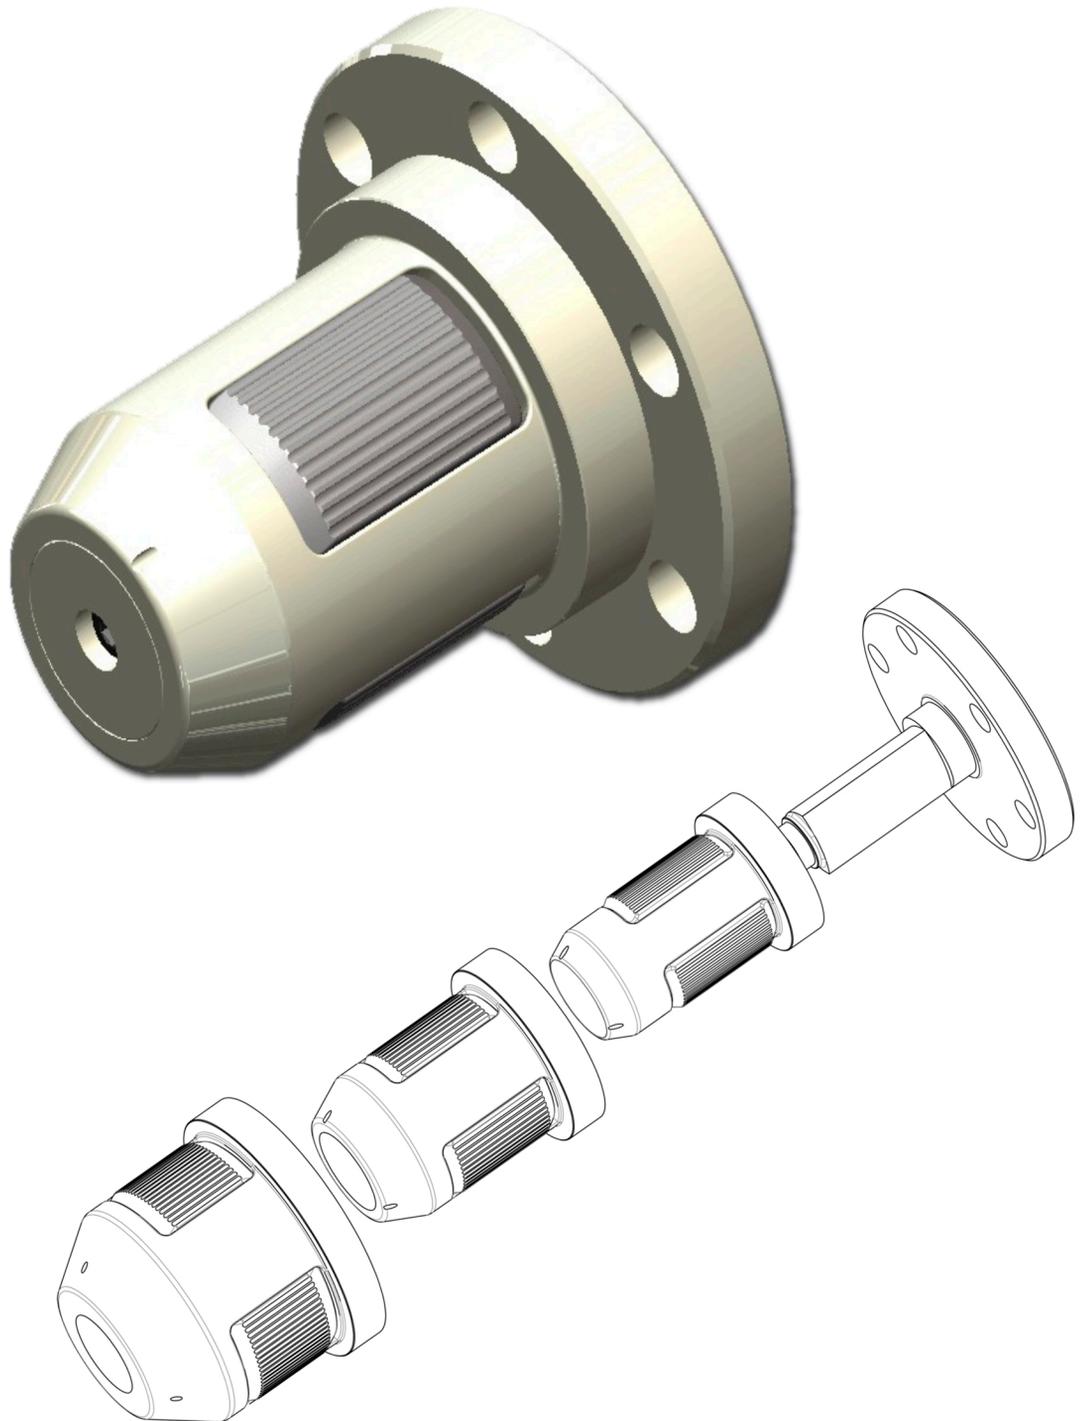


## modular series

## MODULAR TORQUE-ACTIVATED - model TRM

For Companies that have the need to cover different cores I.D. we produce the **modular series** of the torque-activated chuck. With a low price, customers can produce with different core diameters without any trouble.

With the same hub, which always remains mounted on your machine, with a simple screw is possible to replace the adapters basing on your specific needs.

Our product range includes 3 hubs that differ from dimension, thus to cover internal diameter cores from 70mm to 302mm.



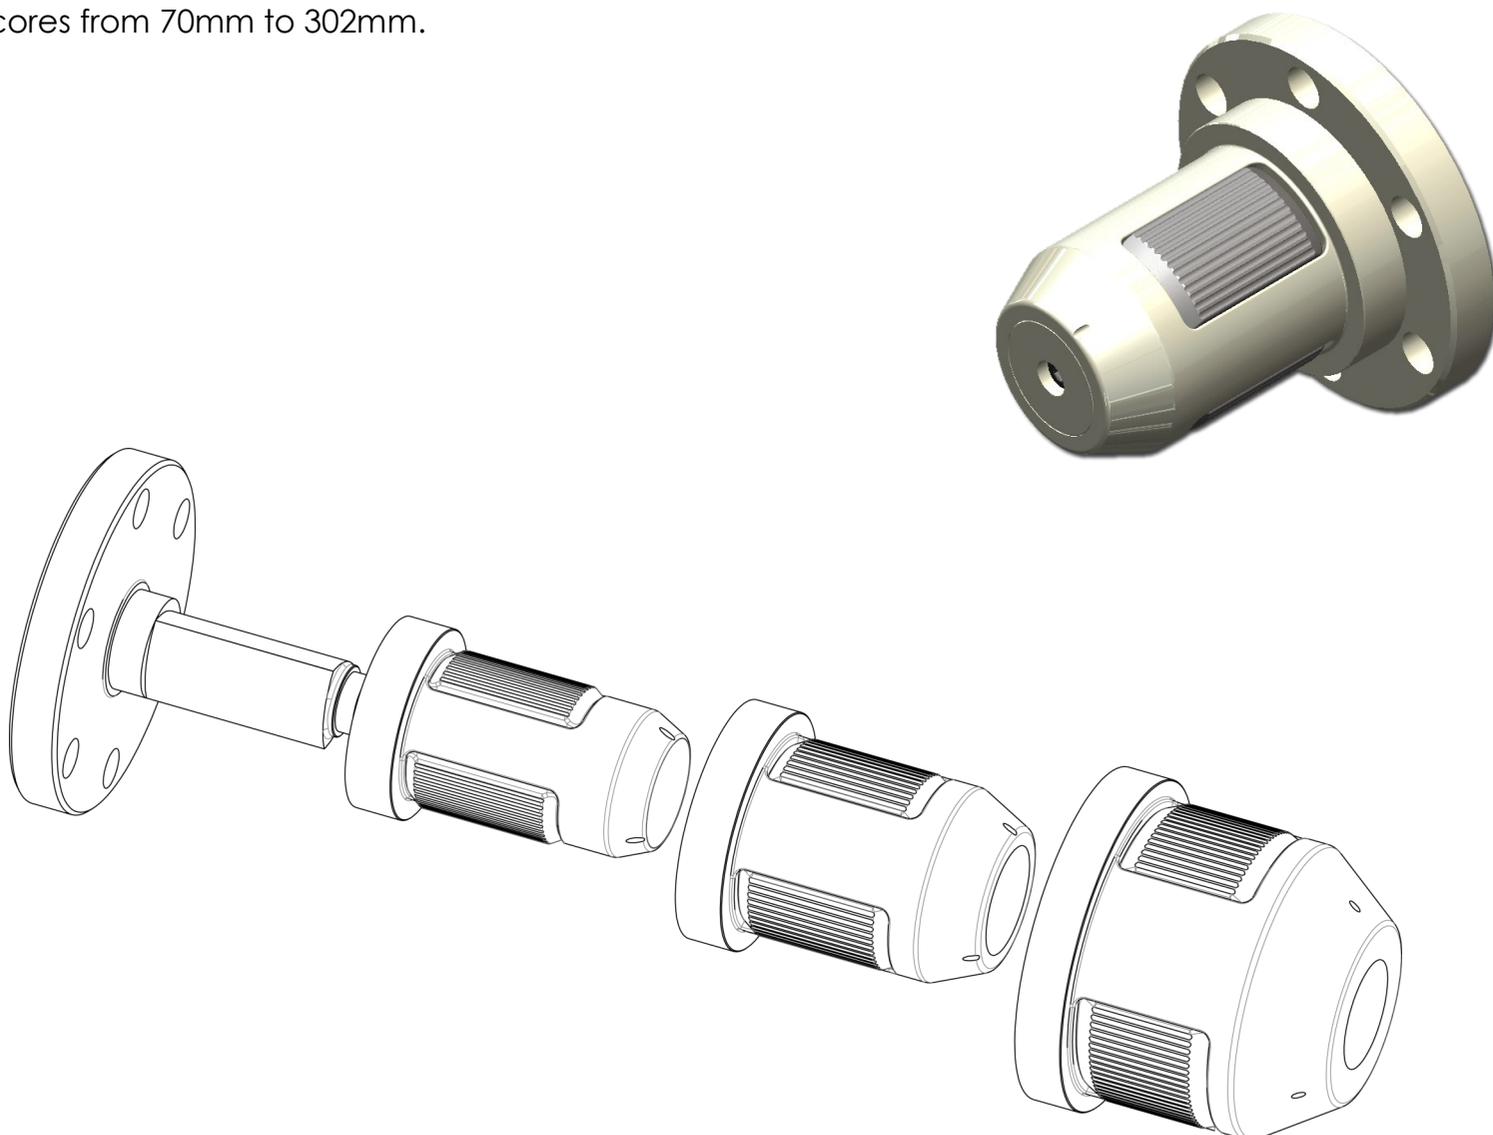


All data shown have to be considered for a single piece. For different dimensions, please contact our technical department.



**modular series**

**MODULAR TORQUE-ACTIVATED - model TRM**

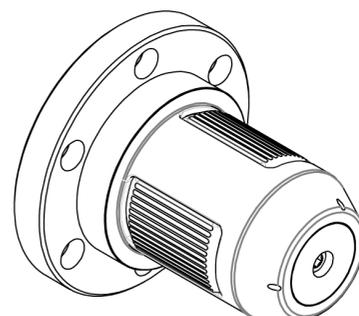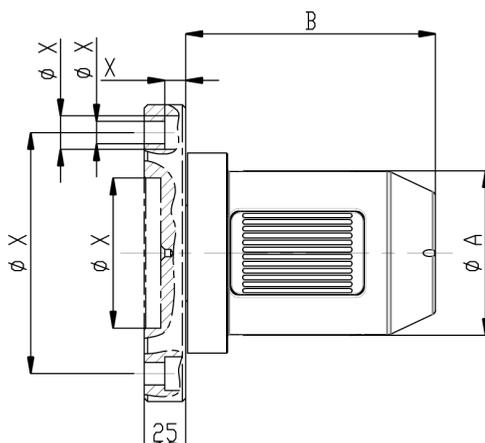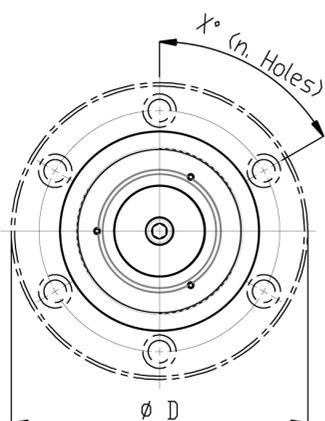

Code	A mm	B mm	C mm	D mm	Expansion (mm)	Load (N) max	Torque (Nm) max	Material cage	X mm
TRM.3.68	68,5	150	25	178	68-75,5	18.000	1.150	Steel	Upon request
TRM.3.74	74	150	25	178	74-81,5	18.000	1.150	Steel	
TRM.3.98	98	150	25	178	98-106,5	18.000	1.150	Steel	
TRM.3.148	148	150	25	178	148-156,5	18.000	1.150	Steel	
TRM.3.297	297	150	25	178	297-305	18.000	1.150	Aluminum	
TRM.3.302	302	150	25	178	302-310	18.000	1.150	Aluminum	

Code	A mm	B mm	C mm	D mm	Expansion (mm)	Load (N) max	Torque (Nm) max	Material cage	X mm
TRM.4.98	98	150	26	196	98-107	37.000	2.500	Steel	A richiesta Upon request
TRM.4.148	148	150	26	196	148-156	37.000	2.500	Steel	
TRM.4.198	198	150	26	196	198-206	37.000	2.500	Aluminum	
TRM.4.248	248	150	26	196	248-256	37.000	2.500	Aluminum	
TRM.4.297	297	150	26	196	297-305	37.000	2.500	Aluminum	
TRM.4.302	302	150	26	196	302-310	37.000	2.500	Aluminum	

Code	A mm	B mm	C mm	D mm	Expansion (mm)	Load (N) max	Torque (Nm) max	Material cage	X mm
TRM.6.148	148	150	30	216	148-156,5	110.000	5.000	Steel	A richiesta Upon request
TRM.6.198	198	150	30	216	198-206,5	110.000	5.000	Aluminum	
TRM.6.248	248	150	30	216	248-256	110.000	5.000	Aluminum	
TRM.6.297	297	150	30	216	297-305,5	110.000	5.000	Aluminum	
TRM.6.302	302	150	30	216	302-310,5	110.000	5.000	Aluminum	

All data shown have to be considered for a single piece. For different dimensions, please contact our technical department.



## PNEUMATIC - model PN

**Industry:** paper & film converting


**Applications:** shaftless unwinders and rewinders - light applications

Our **pneumatic core chucks** are an alternative to expanding shafts or to pneumomechanical chucks, when allowed, for example in applications where the reels are light, or where a better stability and endurance is needed.

Available in a range of diameters that varies from 3" to 6", they can be produced using aluminum alloys or steel, depending on the specific application required by the customer.

### single diameter

### PNEUMATICHÉ - model PN

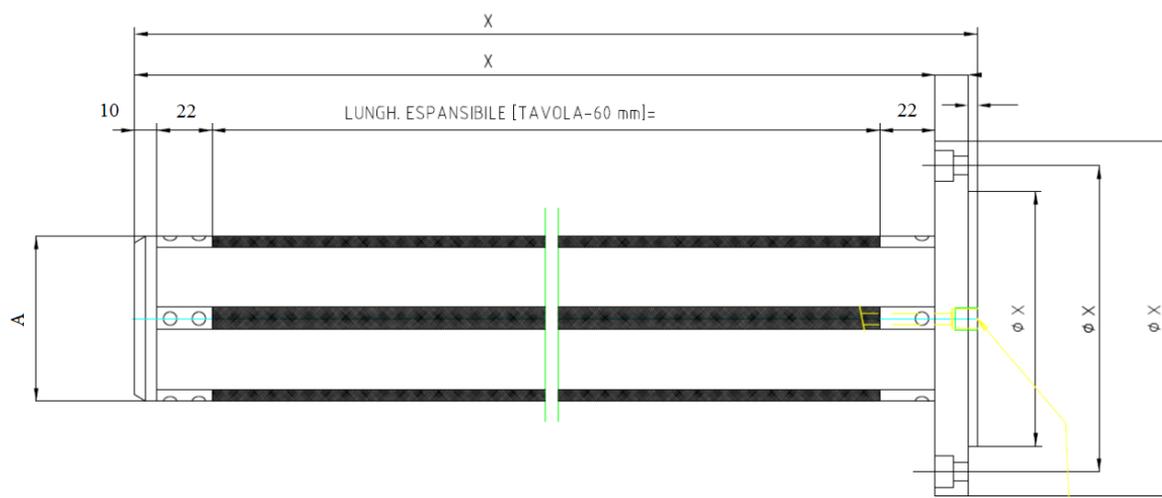

Code	Core I.D.	A' / A'' mm	X mm
PN.69 / PN.74	74/76mm	69/74mm	Upon request
PN.98	100mm	98mm	
PN.118	120mm	118mm	
PN.149	150/152mm	149mm	

All data shown have to be considered for a single piece. For different dimensions, please contact our technical department.